

MIDAIR COLLISION AVOIDANCE (MACA) PAMPHLET



MARCH AIR RESERVE BASE CALIFORNIA

MARCHARPAM91-202
PRESCRIBED BY: AF191-202

8 April 2021
Certified By: 452 AMW/SE (Lt Col S. Robert
Walmsley)

OPR: 452 AMW/SEF

RELEASABILITY: There is no restriction on this publication.



Fellow Pilots,

Southern California is noted for many things. One of them, unfortunately, is the potential for a midair collision due to the heavily congested airspace. This part of the country is one of the most hazardous areas in the world for aircraft. In order to reduce the risk of a major accident, know your personal limitations, learn as much as possible about the airspace system you operate in and know the flight characteristics of the aircraft around you.

This pamphlet was developed in the interest of promoting flight safety. It details factors affecting vision, collision avoidance techniques, and March Air Reserve Base aircraft and their departure/approach routes. Hopefully this information will assist you in avoiding situations where the potential for a midair collision is the greatest. Please contact our Flight Safety Officers with any questions or recommendations at 951-655-4481 (DSN 447-4481).

S. ROBERT WALMSLEY, Lt Col, USAF
Chief of Safety, 452 Air Mobility Wing

FLY SAFE!

Table of Contents

Who represents this pamphlet’s audience?.....	4
March ARB (KRIV) Aircraft Users.....	4
- Air Force Reserve & California Air National Guard	
- U.S. Customs and Border Protection	
Non-March ARB aircraft users.....	5
- Riverside Municipal (KRAL)	
- Perris Valley (KL65)	
- French Valley (KF70)	
- Flabob (KRIR)	
- Hemet-Ryan (KHMT)	
- Lake Elsinore Skylark Airport (CA89)	
Identifying/mitigating hazards.....	6
1. Midair collision avoidance.....	6
2. Congested airspace.....	7
3. Perris parachute drop zone.....	12
4. Remotely piloted aircraft at March ARB (KRIV).....	13
Frequently asked questions.....	15
References, abbreviations, and acronyms.....	16
Useful MACA resources.....	17
Look Alive and Live diagram.....	18

Who represents this pamphlet's audience?

This pamphlet is intended for both March ARB and non-March ARB users. Below are data and images for the most common aircraft at each airfield.

March ARB (KRIV) aircraft users

Air Force Reserve & California Air National Guard

Aircraft	Max Altitude	Max Speed	TCAS
KC-135	50,000' MSL	460 kts	Yes
C-17	45,000' MSL	450 kts	Yes
F-16	50,000' MSL	1,303 kts	No
MQ-9	45,000' MSL	200 kts	No

MQ-9



KC-135



C-17



F-16



Other March ARB Aircraft

US Customs and Border Protection			
Aircraft	Max Altitude	Max Speed	TCAS
PC-12	25,000' MSL	200 kts	Yes
AS-350	15,000' MSL	150 kts	Yes

PC-12



AS-350



Non-March ARB aircraft users

Below lists common aircraft types that frequent airports near March ARB.

Perris Valley (KL65) / Lake Elsinore Skylark (CA89)

Aircraft	Max Altitude	Max Speed
DHC- 6 Twin Otter	26,700' MSL	170 kts
Shorts Skyvan	22,000' MSL	200 kts
Pilatus Porter	20,500' MSL	150 kts

DHC-6 Twin Otter

SC-7 Skyvan

PC-6 Porter



Flabob (KRIR) / French Valley (KF70) / Hemet-Ryan (KHMT)

Aircraft	Max Altitude	Max Speed
Cessna 152	14,700' MSL	109 kts
Beechcraft Bonanza	16,500' MSL	179 kts
Ultralight (General)	12,500' MSL	90 kts
Cessna 172	14,000' MSL	120 kts
Piper Cherokee	14,300' MSL	120 kts
Robinson R22 Helo	14,000' MSL	100 kts
S2	22,000' MSL	230 kts
OV10	28,800' MSL	244 kts

C-152



C-172

Bonanza



Pa-28

Ultralight



R-22



S2



OV10



Identifying/mitigating hazards

1. Midair collision avoidance

During a three-year study of midair collisions (a.k.a. midairs) involving civilian aircraft, the National Transportation Safety Board (NTSB) determined that:


- a. Occupants of most midairs were on a pleasure flight with no flight plan filed.
- b. Nearly all midairs occurred in VFR conditions during weekend daylight hours.
- c. The majority of midairs were the result of faster aircraft overtaking a slower one.
- d. No pilot is immune. Experience ranged from initial solo to 15,000 hours veterans.
- e. The vast majority of midairs occurred at uncontrolled airports below 3,000'.
- f. Enroute midairs occurred below 8,000' and within 25 miles of the airport.
- g. Flight instructors were onboard one of the aircraft in 37% of the midairs.

Mitigation techniques:

- a. **PLAN AHEAD** - Check NOTAMs, deconflict flight route from Special Use Airspace (SUAS) and Military Training Routes (MTRs).
- b. **SEE AND AVOID** - Scan the airspace ahead and to the side. Periodically scan behind as well, since the majority of midairs occur with one aircraft overtaking another.
- c. **CLEAR** - Before executing any flight maneuver, ensure the area is clear.
- d. **COMMUNICATE** - Broadcast your position and intentions when flying to/from uncontrolled airports. Request and use available ATC services; however, you are ultimately responsible for seeing and avoiding other traffic.
- e. **SQUAWK** - Turn it on (if equipped) and adjust to reply on Mode 3/A and C. Without Mode 3/A, TCAS is ineffective. Without Mode C, TCAS effectiveness is greatly reduced.
- f. **BE SEEN** - Turn on anti-collision or other appropriate lights whenever your engine(s) are running. Also, turn on your landing lights when operating below 10,000' MSL, day or night (especially within 10 miles of an airport) or in areas of reduced visibility.

2. Congested airspace

March ARB lies within Class C airspace. You should be aware of four other airports adjacent to the March ARB Class C airspace. These airports include: Riverside Municipal (KRAL), Perris Valley (KL65), French Valley (KF70), Lake Elsinore-Skylark (CA89), Hemet-Ryan (KHMT), and Flabob (KRIR).

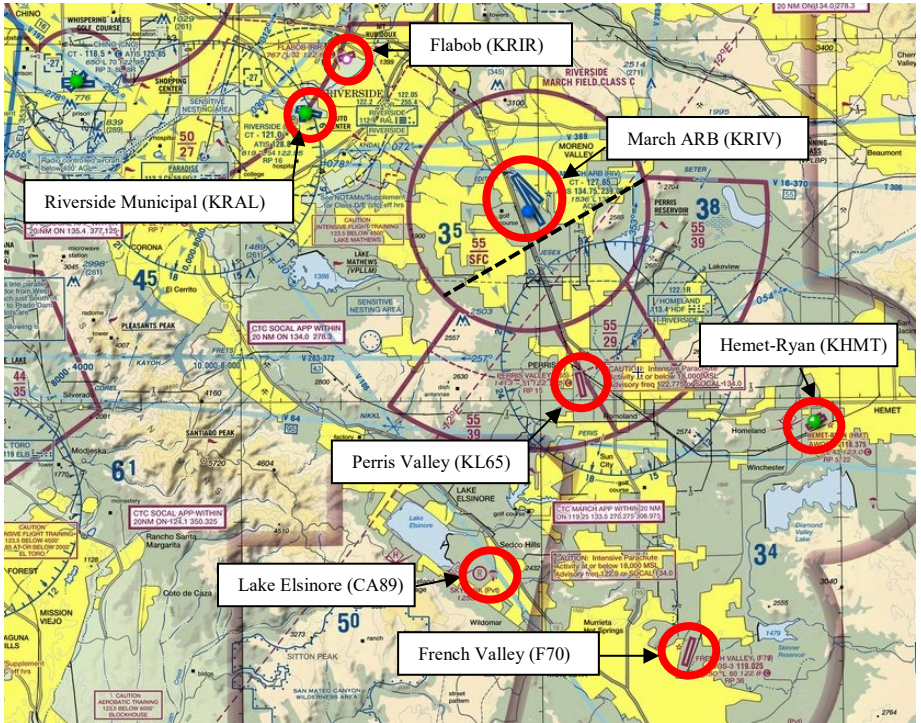

Mitigation techniques:


March ARB ATC provides Class C Services w/in the following:

- **Class C Inner Core:** Surface to 4,000' MSL north of Runway 32 threshold and Surface to 5,000' MSL south of Runway 32 (See black dashed line above).
- **Class C Outer Shelf:** 2,900' MSL to 5,000' MSL in the east and west portions.
- 3,900' MSL to 5,000' MSL in the center portion.
- Southern California TRACON (SoCal) provides March Class C services above 4,000' MSL to 5,500' MSL north of the dashed line, and above 5,000' MSL to 5,500' MSL south of the dashed line.
- **Restrictions:** It is mandatory for all aircraft to establish two-way radio communication by contacting March ARB ATC on 119.25, 133.5, or 270.275 prior to entering the Class C airspace.


There are over 600 General Aviation (GA) and approximately 30 military aircraft associated at these airports. Though the March ARB Class C airspace provides aircraft deconfliction by ATC, the risk for a midair collision increases once you leave its confines. Mitigating this risk is achieved by knowing the typical traffic patterns and the aircraft breakdowns at these adjacent airports.

March ARB Key Points:

- Transient heavies include the C-5, B-767, MD-11, B-747, B-777, and others.
- Other aircraft utilizing March’s services include Navy King Airlift, Army and Guard helicopters, Department of Forestry S2s & OV-10s, and law enforcement aircraft.
- The VFR pattern can be used up to 11,000’ MSL for fighter aircraft.
- Numerous radar approaches to RWY 32 end in a circling maneuver.
- Unmanned MQ-9 aircraft and the chase ship regularly fly in the vicinity.

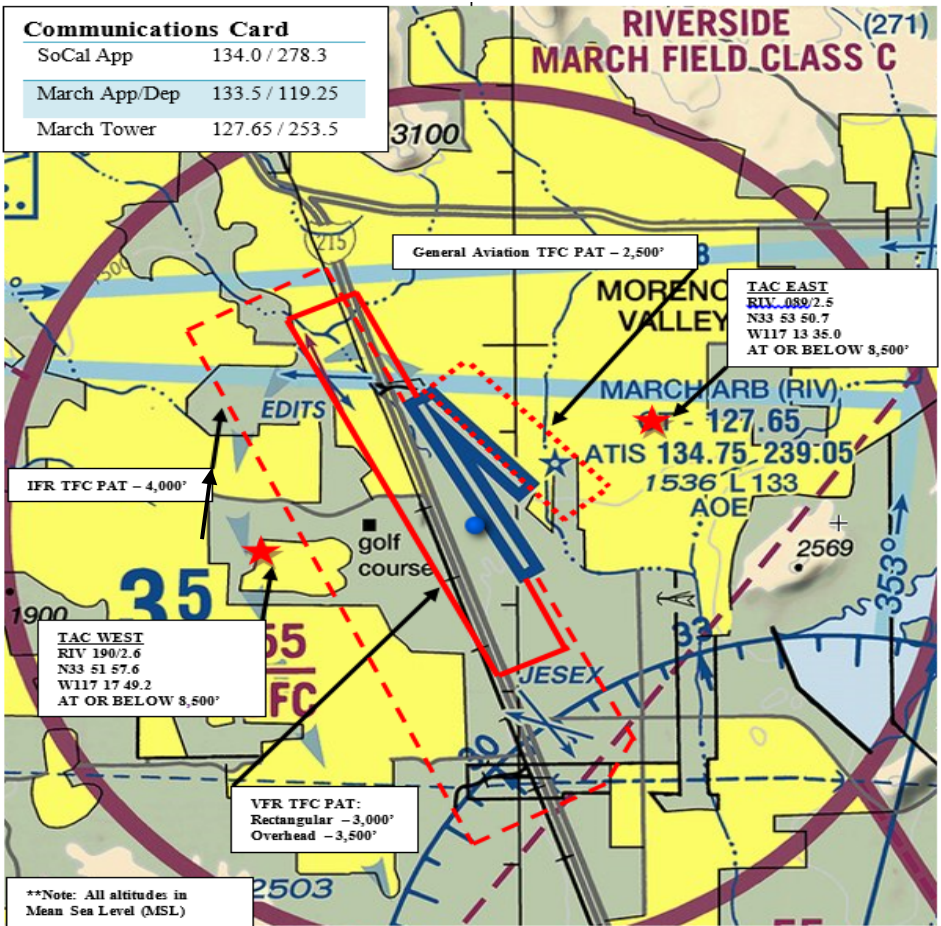

French Valley (F70) - <https://www.aopa.org/destinations/airports/F70/details>

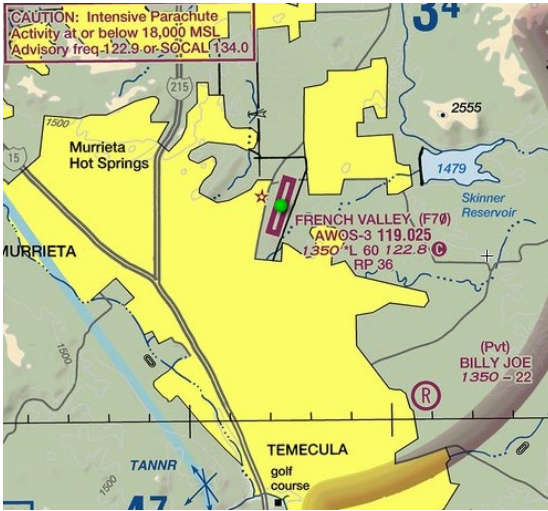

Communication Card

March App	133.5 / 324.1
UNICOM	122.8 (CTAF)

Based GA Aircraft

Single-engine	136
Multi-engine	21
Jets	2
Helicopters	4
Ultralights	3

Traffic Pattern Altitude

Fixed Wing	2,350' MSL
------------	------------

IFR Clearance 0700L-2300L
 March Approach:
 951-655-2355

IFR clearance 2300L-0700L
 SOCAL App: 800-448-3724

Flabob (KRIR) - <https://www.aopa.org/destinations/airports/KRIR/details>



Communication Card

CTAF	122.8
UNICOM	122.8


Based GA Aircraft

Single-engine	136
Multi-engine	12
Ultralights	3

Traffic Pattern Altitude

Fixed Wing - Day	1,464' MSL
Fixed Wing - Night	1,864' MSL

Hemet-Ryan (KHMT) - <https://www.aopa.org/destinations/airports/KHMT/details>

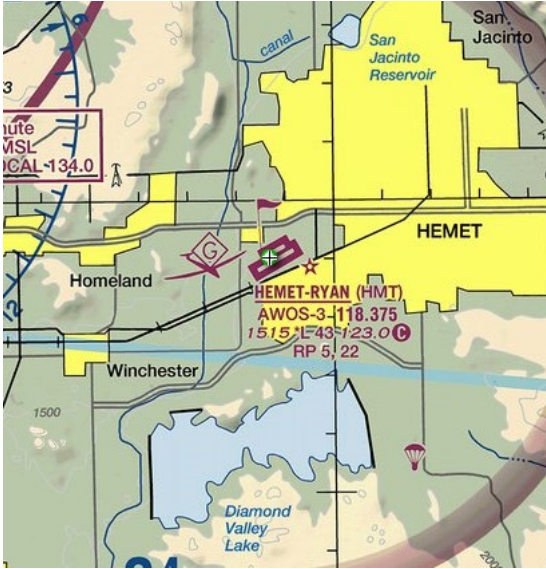

Communication Card	
MULTICOM /	123.0
CTAF	

Based GA Aircraft	
Single-engine	92
Multi-engine	13
Jets	1
Helicopter	7
Gliders	5

Traffic Pattern Altitude	
Fixed Wing - Day	2,515' MSL

Skylark (CA89) – <https://www.aopa.org/destinations/airports/CA89/details>




Communication Card	
MULTICOM	122.9

Based GA Aircraft	
Single-engine	21
Multi-engine	5
Gliders	4
Ultralights	1

Traffic Pattern Altitude	
Fixed Wing - Day	2,253' MSL

3. Perris parachute drop zone

The West coast's largest fleet of skydiving aircraft is located at Perris Valley airport. The majority of parachute jumps happen on weekends between sunrise and sunset, but occur throughout the week. Be aware, operations can occur up to 18,000' MSL!

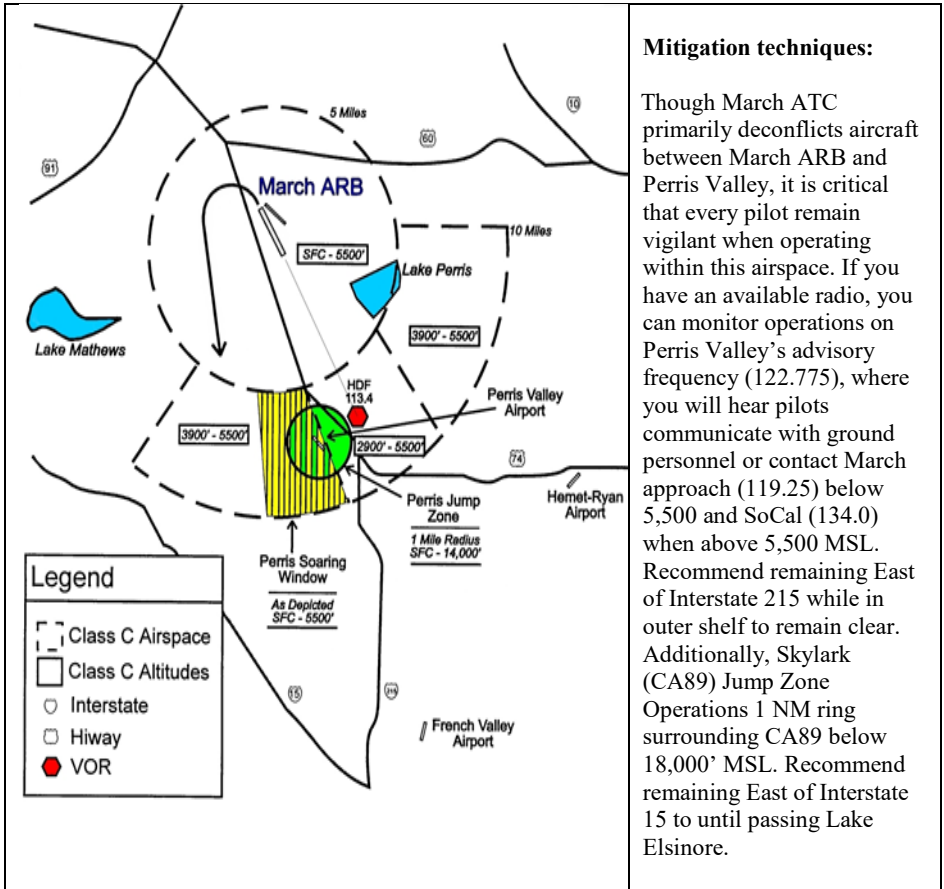

Mitigation techniques:


Though March ATC primarily deconflicts aircraft between March ARB and Perris Valley, it is critical that every pilot remain vigilant when operating within this airspace. If you have an available radio, you can monitor operations on Perris Valley's advisory frequency (122.775), where you will hear pilots communicate with ground personnel or contact March approach (119.25) below 5,500 and SoCal (134.0) when above 5,500 MSL. Recommend remaining East of Interstate 215 while in outer shelf to remain clear. Additionally, Skylark (CA89) Jump Zone Operations 1 NM ring surrounding CA89 below 18,000' MSL. Recommend remaining East of Interstate 15 to until passing Lake Elsinore.

4. Remotely Piloted Aircraft at March ARB (KRIV)

The 163d Attack Wing, California Air National Guard, conducts unmanned MQ-9 Reaper Remotely Piloted Aircraft (RPA) flight operations at KRIV. One unique function to MQ-9 flight operations is the general aviation single-engine chase ship that accompanies the RPA during transit between KRIV and the R-2508 SUAS (near Edwards AFB/KEDW). The chase ship is not required for operations under tower control; however, it may be present under certain conditions. The MQ-9 operates at the same traffic pattern altitude as fixed wing aircraft and only while tower is open and providing Class C services. The majority of flying occurs weekdays, between sunrise and sunset, with occasional night operations. In the event the pilot loses datalink with the MQ-9, it will fly the programmed lost-link path.

When transiting the airspace between KRIV and KEDW, it is recommended to always contact the appropriate ATC controlling agency and squawk IFF mode 3/A and C. The MQ-9 does not have TCAS. Also, be sure to clear for both the MQ-9 and its chase ship. The chase ship will squawk a unique transponder code and trail the MQ-9 within 2 nm and 1,000 ft. vertically. The MQ-9 normally transitions to the R-2508 airspace at 8,500 MSL northbound, and returns to KRIV at 9,500' MSL southbound while maintaining contact with the controlling ATC agency.

KRIV MQ-9 VFR pattern, lost link flight path and lost link orbit

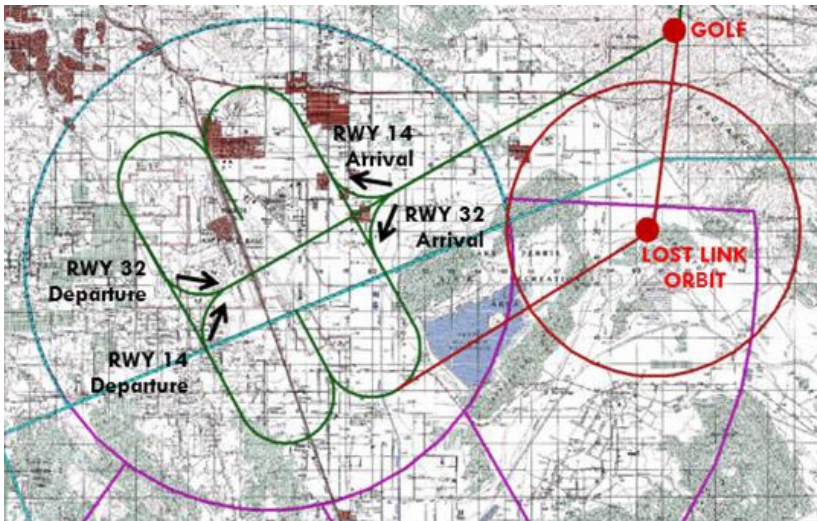

Frequently asked questions

1. How do I report a near midair collision?

If you find yourself in a near midair collision, it is imperative to first continue flying the aircraft! Notify ATC as appropriate (i.e., if you had to maneuver in response to a TCAS resolution advisory). Once you are in a safe position, be sure to document as much information as possible. Key items include: location, altitude, weather conditions, aircraft call signs and types, and the ATC agency. Upon landing, fill out an AF Form 651 (<http://www.e-publishing.af.mil/>) and turn it into the 452d Air Mobility Wing Flight Safety Office (951-655-4481 / 452amw.se@us.af.mil).

2. When is the majority of flying by March ARB aircraft conducted?

Operations normally occur 0700-2300L, Monday through Sunday.

3. What/where is the highest potential of being involved in a midair collision with March ARB aircraft?

Radar base to final for Runway 32 is the area with the highest amount of traffic conflicts. The frequency of near midairs along the recovery routing to Runway 32 is greater than any other area in the March ARB airspace.

4. Where should GA aircraft fly to avoid March ARB aircraft?

Avoiding high traffic areas, such as final for Runway 32, will decrease the possibility of a midair greatly. Also, although nearby MOAs are not restricted from civilian VFR traffic, they should be avoided when active (weekdays and some Saturdays) to minimize midair potential.

5. What are the best ways to see an aircraft to avoid a midair collision?

The best way to see and avoid any aircraft is to use a proper scan pattern backed up by properly squawking your assigned transponder code to allow TCAS-equipped aircraft to see you. One scanning technique is to start at one side of the wind screen and allow your eyes to focus every 10-15 degrees. Remember to search above and below the horizon. Traffic conflicts often occur while one aircraft is transiting the flight path of another. You can also detect other aircraft by communicating with ATC. If traveling near March ARB airspace, contact March Approach on 133.5 or 119.25.

References, abbreviations, and acronyms

References

AFI 91-202, The US Air Force Mishap Prevention Program,
AC 90-48D, Pilots' Role in Collision Avoidance
MARCHARBI 13-204, March Air Reserve Base Instruction - Airfield
Operations

Abbreviations and Acronyms

AF – Air Force
AFB – Air Force Base
AOPA – Aircraft Owners and Pilots Association
APP – Approach
ARB – Air Reserve Base
ARTCC – Air Route Traffic Control Center
ATC – Air Traffic Control
DEP – Departure
FDC – Flight Data Center
GA – General Aviation
L – Local time
MACA – Midair Collision Avoidance
MSL – Mean Seal Level
MTR – Military Training Route
RPA – Remotely Piloted Aircraft
SUAS – Special Use Airspace
TAC – Tactical
TCAS – Traffic Collision Avoidance System
TFC PAT – Traffic Pattern
TRACON – Terminal Radar Approach Control
TWR – Tower
WX – Weather

Useful MACA resources

There are numerous MACA resources on the internet. Below is a list of websites you can use during your flight planning.

1. **Defense Internet NOTAM Service.** This is an official resource to find airport NOTAMs, TFRs and ARTCC FDC NOTAMs.
<https://www.notams.jcs.mil>
2. **Aviation safety reporting system.** This is an official resource which uses NASA as a third party between you and the FAA. Here you can report actual or potential discrepancies involving flight safety with immunity.
<http://asrs.arc.nasa.gov>
3. **Aviation safety information analysis and sharing (ASIAS) system.** This is an official resource from the FAA serving as a source to integrate, analyze and share aviation safety data and information.
<http://www.asias.faa.gov>
4. **AC 90-48D Change 1.** FAA Advisory Circular on pilots' role in collision avoidance.
https://www.faa.gov/documentLibrary/media/Advisory_Circular/AC_90-48D_CHG_1.pdf
5. **How to Avoid a Mid Air Collision.** FAA publication P-8740-51 presents the hazards, causes, and prevention of midair collisions.
https://www.faasafety.gov/gslac/ALC/libview_normal.aspx?id=6851
6. **Collision Avoidance: See, Sense, Separate.** This AOPA Air Safety Institute 8-minute video can be streamed directly from YouTube.
<https://www.youtube.com/watch?v=NQrZrNkmUzs>
7. **Collision Avoidance.** This AOPA Safety Advisor teaches pilots how to visually identify potential collision threats and covers procedures that can lessen the risk of an in-flight collision or runway incursion.
<https://www.aopa.org/training-and-safety/online-learning/safety-advisors-and-safety-briefs/collision-avoidance>
8. **March ARB MACA.** The March ARB website has a link to this document.
<http://www.march.afrc.af.mil/>

A RADAR FOR ALL SEASONS



DISTANCE - SPEED - TIME

M P H	SECONDS	
	600	360
10 miles	60	100
6 miles	36	60
5 miles	30	50
4 miles	24	40
3 miles	18	30
2 miles	12	20
1 mile	6	10
1/2 mile	3	5

CRITICAL SECONDS

Move back 12 feet from this illustration. From that position the silhouettes represent a T-33 aircraft as it would appear to you from the distances indicated in the table on the left. The time required to cover these distances is given in seconds for combined speeds of 360 and 600 mph.

The blocks on the lower left mark the danger area for the speeds quoted, when aircraft are on a collision course. This danger area is based on the recognition and reaction times shown in the table on the lower right.

RECOGNITION
OF
A COLLISION COURSE
(From U. S. Army
Army Safety Manual)

	Seconds
see object	0.1
recognize a/c	1.0
become aware of collision course	5.0
decision to turn left or right	4.0
muscular reaction	0.4
aircraft lag time	2.0
TOTAL	12.5

LOOK ALIVE AND LIVE